



LJQX-13F Series

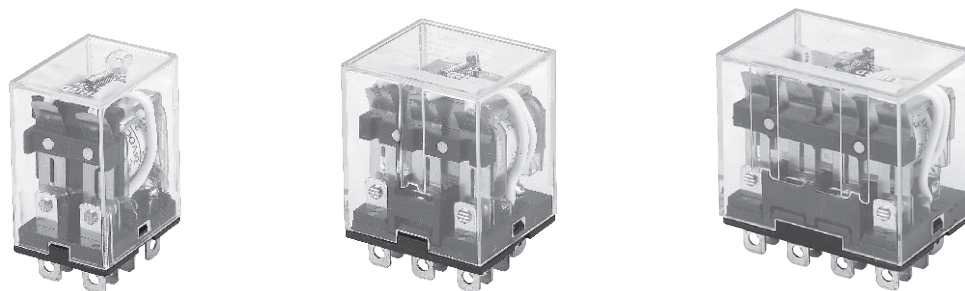


Model		LJQX-13F-2Z	LJQX-13F-3Z	LJQX-13F-4Z
Dimension(mm)		27.3× 21× 35.2	30.8× 27.3× 35.2	41× 27.3× 35.2
Contact Form		2Z 2H 2D	3Z 3H 3D	4Z 4H 4D
Contact Material		Silver alloy		
Resistance Performance Of Contactor Capacity		10A/28VDC 10A/240VAC		
Coil Power at 23℃	DC(W)	1Z 2Z≤ 0.9W, 3Z≤ 1.5W, 4Z≤ 1.6W		
	AC(VA)	1Z 2Z≤ 1.2VA, 3Z≤ 2VA, 4Z≤ 2.5VA		
Coil Voltage	DC(V)	6~220V		
	AC(V)	6~380V		
Pick-up Voltage at 23℃		DC≤ 75% AC≤ 80%		
Drop-out Voltage at 23℃		DC≥ 10% AC≥ 30%		
Max Voltage at 23℃		110%		
Contact Resistance(at 6VDC 1A)		≤ 100mΩ		
Dielectric Strength	Between Open Contacts	≥ 1200VAC 50Hz/1min Leakage current 1mA		
	Contacts pieces	≥ 1500VAC 50Hz/1min Leakage current 1mA		
	Between Coil & Contacts	≥ 1500VAC 50Hz/1min Leakage current 1mA		
Insulation Resistance(MΩ)at 500VDC		≥ 500MΩ		
Service life	Electrical	10 ⁵ Times(Frequency: On1Time/1S, Off1Time/1S)		
	Mechanical	10 ⁶ Times(Frequency: 300Time/1min)		
Ambient Temperature		-25℃~~+55℃		
Terminal type		Insert type, Welding type		
Suitable socket		LPTF08A	LPTF11A	LPTF14A
Product Weight		40g	50g	60g
Same Reference		HH62P、LY2	HH63P、LY3	HH64P、LY4


LJQX-13F-2Z Installation dimensions and connecting diagram

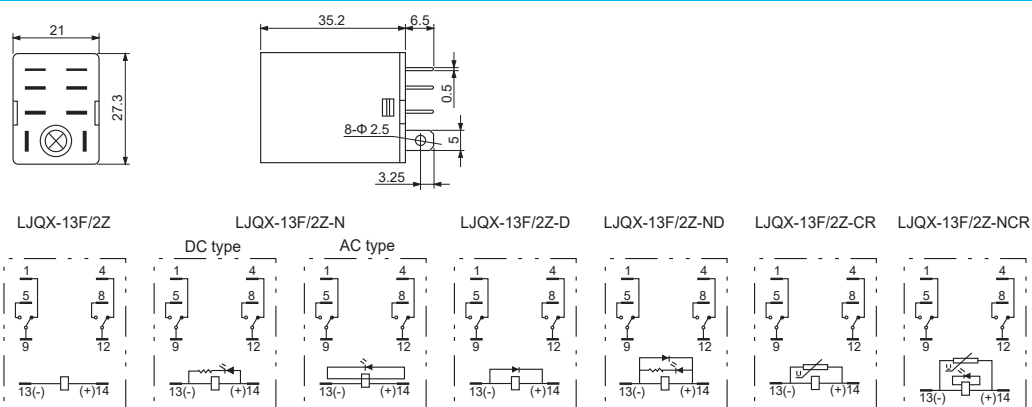


LJQX-13F-3Z Installation dimensions and connecting diagram

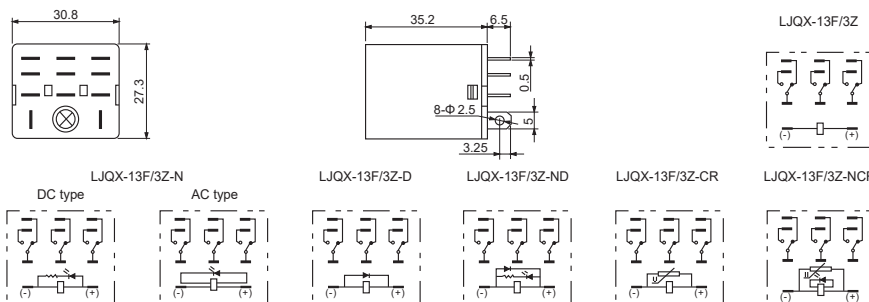

LJQX-13F-4Z Installation dimensions and connecting diagram

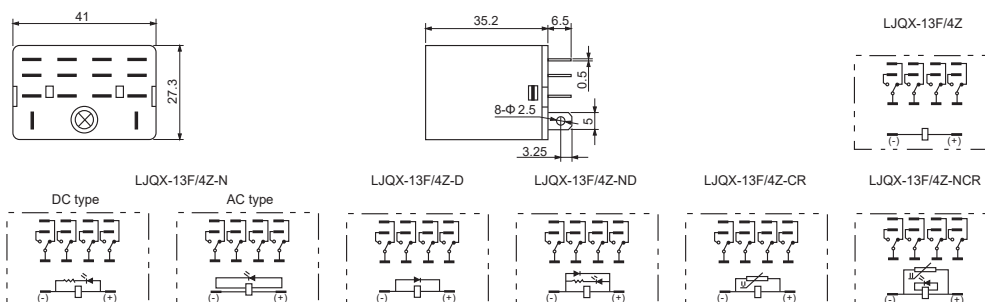

LJQX-13FP-2Z、LJQX-13FP-3Z、LJQX-13FP-4Z Installation dimensions and connecting diagram

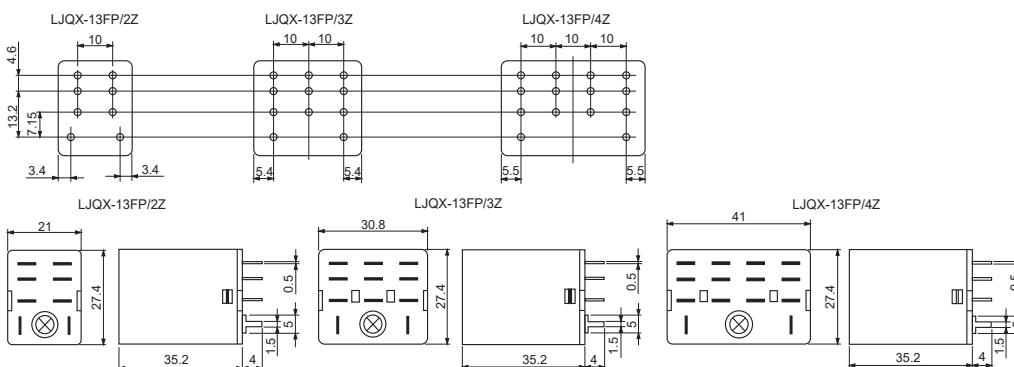

LJQX-13FB-2Z、LJQX-13FB-3Z、LJQX-13FB-4Z Installation dimensions and connecting diagram

