



WP-B2

Half cut-off Led wall pack

- Patent Design, Aluminum Housing & Shatter-proof Glass Refractor
- DLC Listed (42W, 60W, 80W, 100W, 120W)
- ETL, cETL Listed
- High Luminous Efficacy 130lm/w
- IP65 Wet Location
- Wall Mounted or Conduit Mount
- Photocell Removable
- 5 Years warranty



Direct Wall Mount




Conduit Mount



Robust Design
Die-casting Aluminum

Shatter-proof
Glass Refractor

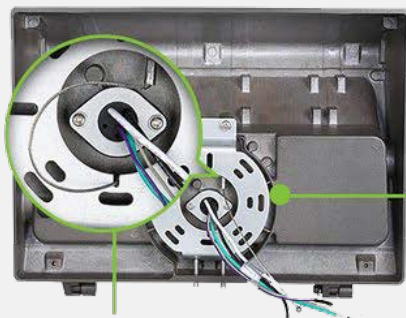

Compatible
junction box

Safety Rope



Photocell Included

Parameter

Model No.	WP-42B2	WP-60B2	WP-80B2	WP-100B2	WP-120B2
Wattage	42W	60W	80W	100W	120W
Luminous Efficacy	130lm/w	130lm/w	130lm/w	130lm/w	130lm/w
Lumens output	5460lm	7800lm	10400lm	13000lm	15600lm
HID/MF Equivalent	200W	250W	350W	400W	500W
Fixture Weight	3.3Kg(7.3lbs)	3.3Kg(7.3lbs)	3.7Kg(8.2lbs)	3.7Kg(8.2lbs)	4.1Kg(9.0lbs)
LEDs Brand	SMD3030				
CCT	3000K, 4000K, 5000K,5700K				
CRI	70+ or 80+				
Beam Angle	120°				
Input Voltage	100-277Vac or 100-347V 50/60Hz				
Function	Photocell, Motion Sensor, Emergency optional				
Power Factor	>0.9				
IP Rating	IP65 /Wet Location				
Working Temp.	-30°C ~ 50°C (-22°F~122°F)				
Storage Temp.	-40°C ~ 70°C (-40°F~158°F)				
Finish	Browm				
Housing	Die-casting Aluminum				
Diffuser	Plastic				
Installation	Surface mounted				
Lifespan(L70)	>100,000 Hours				
Certification	ETL, cETL, DLC				

Dimension



Order Information

Sample: WP-60B2-277-50K-P

	-XXX	-XXX	-X
Product Family	Voltage	CCT	Function
WP-42B2 = 42W WP-60B2 = 60W WP-80B2 = 80W WP-100B2 = 100W WP-120B2 = 120W	277 = 100-277Vac 347 = 100-347Vac	30K = 3000K 40K = 5000K 50K = 5000K 57K = 5700K	N = Non-dimming P = Photocell M = Motion Sensor


Package Information

ITEM	QTY/CTN	G. W.	CTN MEAS	Volume(CBM)
WP-42B2	1pcs	3.9kg(8.6lbs)	37x29x27.5cm (14.6"x11.4"x10.8")	0.030
WP-60B2	1pcs	3.9kg(8.6lbs)	37x29x27.5cm (14.6"x11.4"x10.8")	0.030
WP-80B2	1pcs	4.3kg(9.5lbs)	37x29x27.5cm (14.6"x11.4"x10.8")	0.030
WP-100B2	1pcs	4.3kg(9.5lbs)	37x29x27.5cm (14.6"x11.4"x10.8")	0.030
WP-120B2	1pcs	4.7kg(10.4lbs)	37x29x27.5cm (14.6"x11.4"x10.8")	0.030

Easy Installation



Get the screw on the fixture loosened by using the hexagon wrench, then take off the mounting plate on the fixture.

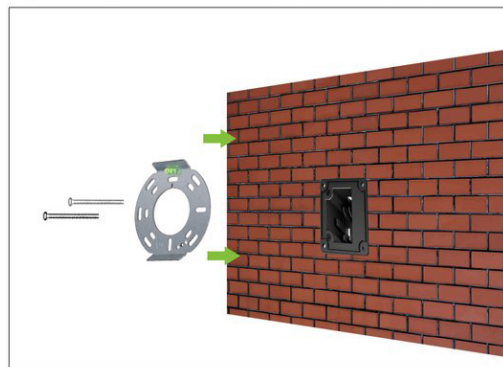

Use two #8 screws to attach the mounting plate to the junction box.



Use the threaded erminal to connect L/N/groundwire, dim+/dim- (if not, please ignore) separately.



Complete the wiring to the power source and ground.