




LINEAR LIGHT 40-50W LINKABLE



110°

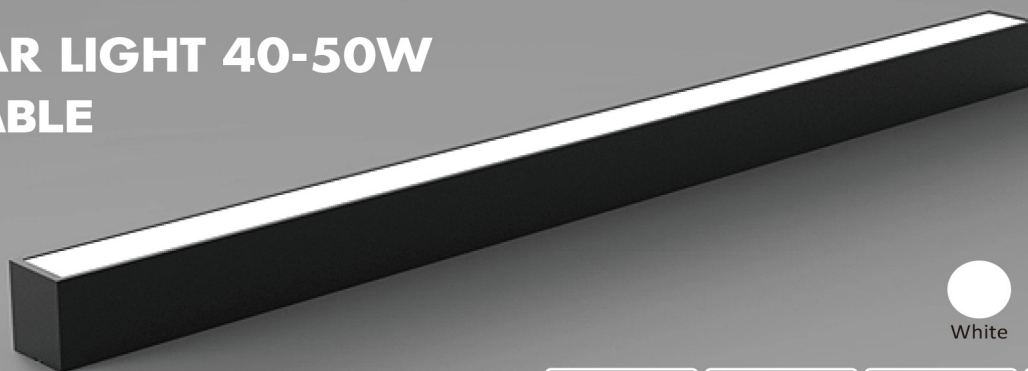


White



Grey



Black



Description

- **Seamless connection, power up to 2200W.**
- **Multiple combinations ,Easy handle and tool-free.**
- **Black or white or Grey housing options.**
- High-tech optical design with maximum efficiency.
- Aluminum made, with excellent heat-dissipation.
- Surface painting spray, anti-corrosion, anti-rust, elegant and durable.
- No UV, No lead, No Mercury.
- Energy-saving, long lifespan, easy installation.
- CRI>80, SDCM<5.

Application

- Hotel
- Commercial Purpose
- Meeting Room
- School
- Residential & Institution
- Factory & Office
- Hospital
- Other lighting location



Light source

LED Type	2835
Color Accuracy(CRI)	80
Color Temperature	3000K/4000K/5000K/5700K


Photoelectric

Model Number:	Power	Dimension	Input	Luminous Efficiency	Lumens Output	Ra	LED	Beam Angle
LLC120A -40W	40W	1200*50*70mm	200-240V	120LM/W	4800LM	80	2835	110°
LLC150A -50W	50W	1500*50*70mm	200-240V	120LM/W	6000LM	80	2835	110°
LLC120B -40W	40W	1200*50*70mm	200-240V	120LM/W	4800LM	80	2835	110°
LLC150B -50W	50W	1500*50*70mm	200-240V	120LM/W	6000LM	80	2835	110°
LLC1616L-10W	10W	165*165*70mm	200-240V	120LM/W	1200LM	80	2835	110°
LLC3116T-15W	15W	310*165*70mm	200-240V	120LM/W	1800LM	80	2835	110°
LLC3131X-20W	20W	310*310*70mm	200-240V	120LM/W	2400LM	80	2835	110°

*Specifications using 5700K and subject to change. All parameters +/- 10%.
*Available 3W on a per project basis.


Model Description

XXX:120/150 yy:40/50



LLCxxxA-yyW

With AC cable,
Use individually or beginning part



LLCxxxB-yyW

Without AC cable,
Use in multi multi-connection



LLC1616L-10W

✗ Easy handle and tool-free



LLC3116T-15W

✗ Easy handle and tool-free



LLC3131X-20W

✗ Easy handle and tool-free

LINEAR LIGHT 40-50W


Electrical Driver

Input	AC200-240V
Frequency	50/60Hz
Relevant	EN55015 EN550221 IEC61347-1
Power Factor	>0.9
THD	<20%
Power Efficiency	>85%
Protection	Surge Short Circuit Over Voltage Over Current Over Temp.
MTBF	Minimum MTBF 50,000 hours at 100% load & 40°C






Environment

Operating Temperature	-20°C ~ 50 °C
Storage Temperature	-20°C ~ 60 °C
Operating Humidity	90% Rh or below(@-20°C~40°C)
Application Area	Indoors
Lifespan	50,000 Hrs

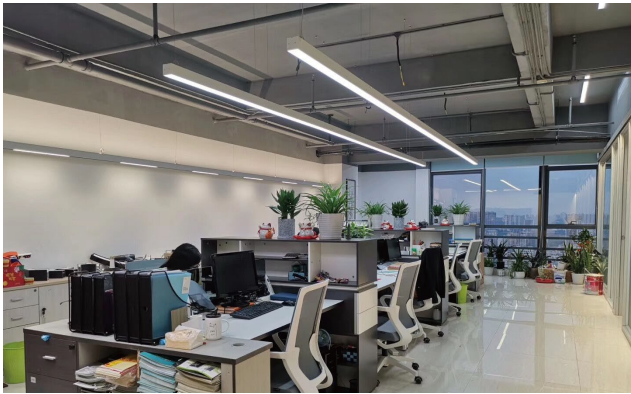

Attachment



Suspension wire,suitable for
pendant mounting millimeter wire
L=2000mm white, silver, black



Mounting clips, suitable for
ceiling mounting Aluminium



Connect Fixed Clips
Aluminium



PC diffuser(MAX 50M)



L shape connector
Aluminium




T shape connector
Aluminium



X shape connector
Aluminium

Installation

Single installation



linkable installation

