

# G-Bay

## Eco UFO High Bay




**CGT**

[info@cgtled.com](mailto:info@cgtled.com)



- DLC Listed
- ETL, cETL, CB, CE, TUV, SAA Listed
- High Lumens 130-180lm/w
- IP65 Wet Location
- 1-10V dimming instandard
- 5 Years warranty

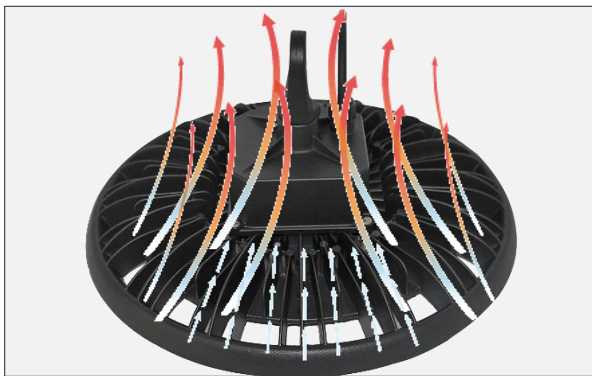

### Good Heat Dissipation

Die-Casting Aluminum body, Efficient heat dissipation, directing heat up and out. makes little lumens depreciation.



### High Quality Driver

Constant Current High quality driver with silica gel. 1-10V dimming instandard.



### High Lumens

High efficiency Fresnel lens  
130-180lm/w optional  
beam angle : 60° /90 ° /120°




### Slim Body Design

Extremely compact design, 40HQ Container can load around 2600pcs 150W, largely save The shipping cost

## Parameter

Model No.	HB-100G	HB-150G	HB-200G	HB-240G
Wattage	100W	150W	200W	240W
Luminous Efficacy (Optional)	130lm/w 160lm/w 180lm/w	130lm/w 160lm/w 180lm/w	130lm/w 160lm/w 180lm/w	130lm/w 160lm/w 180lm/w
Lumens output (Optional)	13000lm 16000lm 18000lm	19500lm 24000lm 27000lm	26000lm 32000lm 36000lm	31200lm 38400lm 43200lm
HID/MF Equivalent	250-400W	400-600W	700-1000W	800-1200W
Fixture Weight	2.1Kg(4.6lb)	2.5Kg(5.5lb)	3.5Kg(7.7lb)	3.5Kg(7.7lb)
LEDs Brand	Lumileds (Philips) SMD3030			
CCT	3000K, 4000K, 5000K,5700K			
CRI	70+ or 80+			
Beam Angle	60° , 90° ,120°			
Input Voltage	100-277/100-347Vac 50-60Hz			
Dimming	1-10V dim in standard			
Power Factor	>0.95			
IP Rating	IP65 /Wet Location			
Working Temp.	-40° C ~ 50° C (-40° F~122° F)			
Storage Temp.	-40° C ~ 70° C (-40° F~158° F)			
Finish	Black (White, Silvery customized)			
Housing	Die-casting Aluminum			
Diffuser	PC Lens			
Installation	Hanging, Mounting			
Lifespan(>70)	>100,000 Hours			
Certification	ETL, cETL, DLC, CE, RoHs, CB, TUV-Mark, SAA			


## Dimension

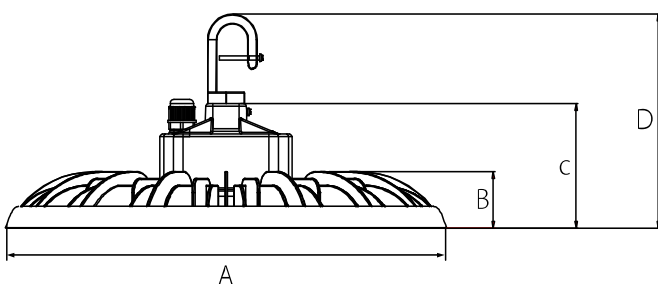


Unit: mm(inch)

Power	A	B	C	D
100W	300(11.8")	31(1.2")	90(3.5")	155(6.1")
150W	330(13.0")	41(1.6")	90(3.5")	155(6.1")
200W	390(15.3")	41(1.6")	90(3.5")	155(6.1")
240W	390(15.3")	41(1.6")	90(3.5")	155(6.1")


# Photometric

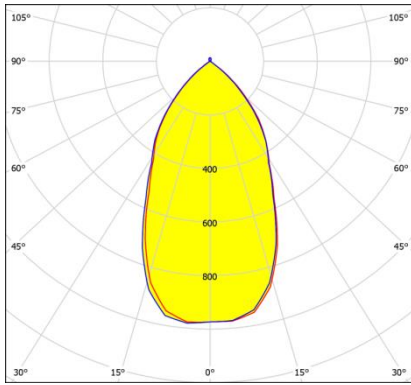

60° Lens

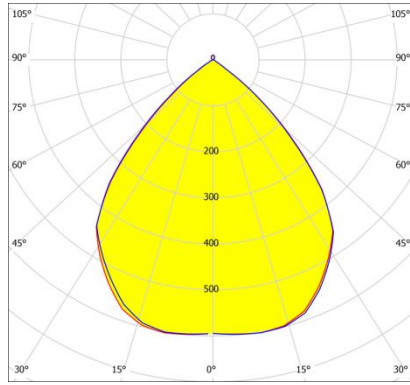

90° Lens

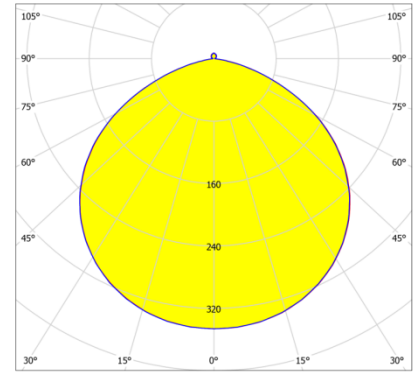

120° Lens

## Order Information

Sample: HB-150G30K90N

	XXX	XXX	X
<b>Product Family</b>	<b>CCT</b>	<b>Beam Angle</b>	<b>Function</b>
HB-100G = 100W HB-150G = 150W HB-200G = 200W HB-240G = 240W	30K = 3000K 40K = 5000K 50K = 5000K 57K = 5700K 65K = 6500K	60 = 60° Lens 90 = 90° Lens 120 = 120° Lens	Blank = 1-10V dim N = Non dim S = ON/OFF Sensor BS = Bi-level Sensor
<b>In Standard</b>	<b>Options (add as Suffix)</b>		<b>Accessories (order Separately)</b>
Black Finish 130lm/w CRI>70 Input Voltage: 100-277Vac 50/60Hz	160lm = 160lm/w efficacy version 180lm = 180lm/w efficacy version WH = White Finish (MOQ>1000pcs) SV = Silvery Finish (MOQ>1000pcs) Other customized		BK = Mounting Bracket SK = Handing Chain 1m HB-G-90PCR = 90 PC Reflector

## Package Information

ITEM	QTY/CTN	G. W.	CTN SIZE
HB-100G	1pcs	3.0kg(6.6lb)	36x34x15cm (91.5"x86.4"x38.1") (0.017cbm)
HB-150G	1pcs	3.3kg(7.3lb)	39x38x15cm (99.1"x96.5"x38.1") (0.017cbm)
HB-200G	1pcs	4.3kg(10.9lb)	45x43x15cm (114.3"x109.2"x38.1") (0.025cbm)
HB-240G	1pcs	4.3kg(10.9lb)	45x43x15cm (114.3"x109.2"x38.1") (0.029cbm)

## Container Loading QTY

ITEM	20GP	40GP	40HQ
HB-100G	1647pcs	3412pcs	4000pcs
HB-150G	1120pcs	2320pcs	2720pcs
HB-200G	966pcs	2000pcs	2345pcs
HB-240G	966pcs	2000pcs	2345pcs